



RHINO METALS™
PROTECTING & SECURING AMERICA

NIGHTSTAND OWNER'S MANUAL

WWW.RHINOSAFE.COM

MAKERS OF RHINO, IRONWORKS, KODIAK, BIGHORN, & LONGHORN SAFES

QUESTIONS about your new purchase, this owner's manual or other RHINO METALS™ products, please contact:

Rhino Metals, Inc.

607 Garber Street

Caldwell, ID 83605

Phone: (208) 454-5545

Fax: (208) 459-0819

NOTE: FOR TECHNICAL SUPPORT ISSUES, IT IS HELPFUL TO BE NEAR YOUR PRODUCT WHEN YOU CALL.

★ ★ ★ **PROTECTING & SECURING AMERICA** ★ ★ ★

VETERAN OWNED AND OPERATED SINCE 1995

 @rhinometals

 Rhino Metals, Inc.

 Rhino Metals

MANUFACTURED BY RHINO METALS, INC. | WWW.RHINOSAFE.COM | (208) 454-5545

**CONGRATULATIONS ON YOUR NEW RHINO METALS™
NIGHTSTAND!**

ATTACH YOUR ORIGINAL RECEIPT HERE

PLEASE READ THIS MANUAL THOROUGHLY BEFORE
SETTING UP YOUR NEW PRODUCT. FAILURE TO COMPLY
WITH THE DIRECTIONS AND PRECAUTIONS COULD
RESULT IN SERIOUS INJURY OR DEATH.

Please fill out the information below about your new nightstand:

Purchased From: _____

Purchased Date: _____

Model No: _____

Serial No: _____



**IT IS HIGHLY ADVISABLE THAT YOU DO NOT STORE
YOUR COMBINATION, PROOF OF PURCHASE OR
OWNER'S MANUAL INSIDE YOUR SAFE**

! WARNING !
Tipping of unit can cause serious injury or death.

- Safe must be anchored to floor prior to use, as instructed in the owner's manual
- Do not pull on door with door open unless unit is properly anchored to floor
- Unit is less stable with door open, unless anchored to the floor
- Install on level ground
- Keep children away



TABLE OF CONTENTS

Registration Form	5
Delivery and Installation	7
Exterior	8
Glossary of Terms	9
Interior	10
Glossary of Terms	11
Electronic Lock Operating Instructions	
Sentinella™ Electronic Lock	12
Changing Your Code	13
Using Your Sentinella Override Key.....	13
SecuRam Electronic Lock	14
Changing Your Code	15
Lost Codes for Electronic Locks.....	15
Removing Shipping Feet (if Equipped)	16
Anchoring Your Nightstand	17
Care and Maintenance	18
Troubleshooting	19
Warranty Claims and Repairs	19
Insurance Coverage	20
Extended Lock Warranty (for purchase).....	20
Limited Warranty	21
Extended Lock Warranty Purchase Form	22
Notes	23

What's Inside:

- Owner's Manual
- Accessory Sheet
- Adjustable Shelf (if equipped)
- Shelf Clips (if equipped)
- Power Cord (if equipped)



REGISTRATION FORM



Register your nightstand with Rhino Metals for ease of warranty verification.

To register your product and validate ownership for warranty and/or repair purposes, submit the form on <https://rhinosafe.com/limited-warranty/> or cut this registration form along dotted line and complete and return by mail, **along with a copy of the original purchase receipt**, to:

**Registration Department
Rhino Metals, Inc.
607 Garber Street
Caldwell, Idaho 83605**

--	--

Model Number

Serial Number

Name _____

Address _____

City _____ Country _____

State/Prov _____ Zip/Postal _____

Phone _____

Email _____

Check box if you prefer not to receive our newsletter.

Date of Purchase _____

Where did you purchase the product from? (Check one)

rhinosafe.com In-store* Online*

*Store/Website name: _____

Please take a moment to fill out the survey on the back of this sheet.



How is the quality and function of your new nightstand?

- Excellent Very Good Good Fair Poor

How was the retail store where you purchased your new nightstand? (if applicable)

- Excellent Acceptable Needs Improvement

A. Safe display

- Excellent Acceptable Needs Improvement

B. Sales staff

- Excellent Acceptable Needs Improvement

C. Selection available

- Excellent Acceptable Needs Improvement

How did you first hear about Rhino Metals? (Check all that apply)

- Facebook YouTube Instagram Online In-store
 Trade Show/Gun Show Other: _____

How influential were the following factors in your purchase?

A. Protecting against crime / burglaries

- Very Influential Somewhat Influential Little to No Impact

B. Concern over the economy / financial instability

- Very Influential Somewhat Influential Little to No Impact

C. Securing firearms

- Very Influential Somewhat Influential Little to No Impact

D. Fire protection

- Very Influential Somewhat Influential Little to No Impact

What did you like about our safes/nightstands that led you to choose us?

How influential were the following features when buying one of our products?

A. Lifetime warranty?

- Very Influential Somewhat Influential Little to No Impact

B. Size / capacity / number of gun slots?

- Very Influential Somewhat Influential Little to No Impact

C. Functionality?

- Very Influential Somewhat Influential Little to No Impact

D. Price / promotion?

- Very Influential Somewhat Influential Little to No Impact

E. Any other reason? _____

What is your age group?

- 18-24 25-34 35-44 45-54 55+

DELIVERY AND INSTALLATION

If you are doing your own delivery and installation, you need to read and follow the instructions within this manual. There are risks associated with doing your own delivery and installation. We recommend using a professional moving company to move your nightstand. The nightstand can be heavy so always use caution when moving to prevent damage to flooring, doorways and walls, and personnel.

Unboxing (do not use a box cutter or you may damage the item)

1. Remove and discard all outer packaging, including the cardboard box, plastic protective cover and foam.
2. The nightstand is shipped with the door closed and the lock in an unlocked position. Open the nightstand's safe compartment (if equipped) by following the **LOCK OPERATING INSTRUCTIONS** on pages 12-15.
3. Note that some nightstands do not come equipped with a safe compartment. Refer to the included insert for additional instructions.



SAFETY PRECAUTIONS

- ◆ Do not attempt to move the nightstand with the nightstand's safe door open or unlocked.
- ◆ It is highly recommended that you do not remove the nightstand's safe door from the nightstand.
- ◆ Failure to follow these precautions can result in serious injury or death.

EXTERIOR

Please note that nightstand shown is for reference only.

Actual model and design may vary.



Exterior: Glossary of Terms

Model and Serial No. Label

Contains the model and serial number, attached to the back of the nightstand.

Drawer

Pull out to use.

Safe Lock

Mechanism with a combination that allows the nightstand safe to be securely locked.

Safe Handle

Allows the nightstand's safe door to be opened after the correct combination is entered into the safe lock.

The Clutch

If the safe handle is rotated in either direction without first unlocking the lock, the clutch automatically disengages the shaft in the nightstand's safe handle from the locking mechanism. The clutch helps prevent damage to the lock without requiring a failure somewhere else in the mechanism that would cause a lockout.




Call for assistance if the clutch is not functioning properly. Do not attempt to adjust the clutch yourself.

External Hinges

Movable mechanism allowing the nightstand's safe door to swing open and closed. External hinges allow 180° opening for greater access to contents inside the nightstand safe and helps provide the best fire and theft protection possible.

INTERIOR

Please note that nightstand shown is for reference only. Actual model and design may vary.

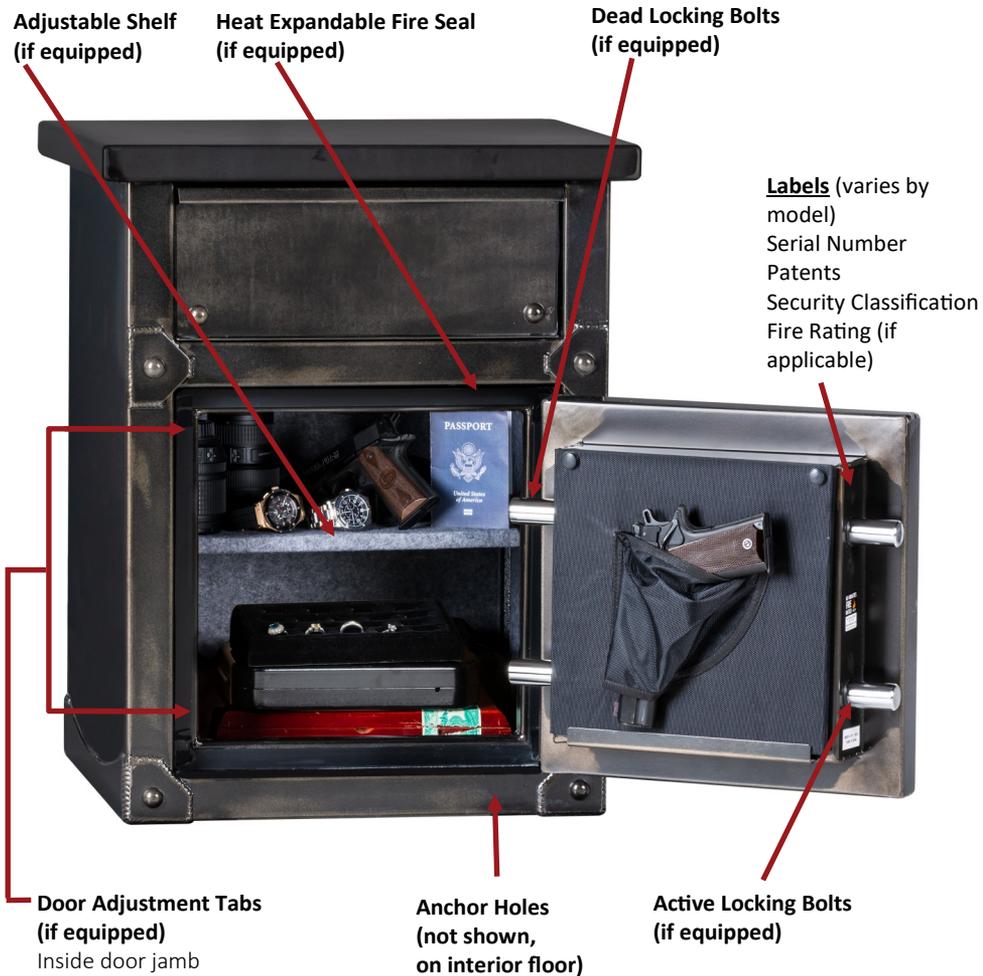

Interior: Glossary of Terms

Adjustable Shelving

The shelf is adjustable by placing the included clips at the desired level.



Maximum load for shelf is 40 lbs. Always be sure shelf is level before loading.

Anchor Holes

Predrilled into the bottom floor, allowing nightstand to be securely bolted to the ground.

Dead Locking Bolts

Door bolts that do not move when nightstand's safe handle is rotated.

Door Adjustment Tabs

Adjustable tabs used to tighten the nightstand's safe door that may otherwise shake forward and back while closed. Simply bend out using a screwdriver to put tension on the locking bolts, pulling the nightstand's safe door into the frame. Do not pull door adjustment tabs out too far as this can damage the locking bolts and make the safe difficult to open.

Heat Expandable Fire Seal

Factory installed around the inside frame of the nightstand's safe body to provide additional fire protection. Seal will expand up to seven times its flat size when exposed to high temperatures, sealing door gaps from smoke and heat. Seal does not require any maintenance, nor should the seal be removed.

Labels

Contains pertinent information regarding patents, fire protection, and the security classification of the nightstand.

Locking Bolts

Door bolts that retract and extend when rotating the nightstand's safe handle to unlock and lock the safe, respectively.

Model and Serial No. Label

Model and serial number, attached at bottom of the door.

ELECTRONIC LOCK OPERATING INSTRUCTIONS

Opening Your Nightstand Safe for the First Time

Rhino Metals nightstands are equipped with Sentinella™ electronic key override locks or SecuRam electronic locks. The lock is shipped unlocked and without a battery. The default code is 1-2-3-4-5-6.

Open the door by rotating the hand wheel on the front of the nightstand safe clockwise and pull the safe door open.

Sentinella™ Key Override Electronic Lock

Installing the Battery

We highly recommend using a Duracell® or Energizer® alkaline battery with a “Use Date” of at least 4 years in the future.

1. With the safe door open, pinch two tabs on underside of lock
2. Pull down on tabs to reveal the battery cavity
3. With the battery cavity accessible, install a new 9-volt battery into the terminals.
4. Push the battery cavity up into the keypad to close.
5. With the door open, test the operation of the lock several times before closing and locking the nightstand safe.

Operating Your Electronic Lock

1. To unlock the nightstand safe, enter the existing six-digit code. Each key press is confirmed with an audio and visual (LED flash) signal.
2. The lock will indicate a valid code entry with a beep and red light flash. Within 4 seconds, turn hand wheel clockwise to open the door.
3. To lock the nightstand safe, turn the handle counter-clockwise until it stops. Always test to see if the lock has re-engaged by turning the handle clockwise.

Wrong Try Penalty

Every invalid code entry is indicated by two long beeps and red LED flashes. Entering 3 consecutive invalid codes result in a 5-minute lockout/penalty period. The lock will remain unresponsive to further code entries until the penalty period is over. During the penalty period, the keypad will beep and flash at 5 second intervals until the penalty period is over. At the end of the penalty period, 3 more consecutive invalid codes may be entered before the lock starts another penalty period.



Removing the battery during the delay period will extend the delay period.

Additional Electronic Lock Information (Sentinella Locks)

Changing Your Code

All Sentinella™ electronic lock codes are set at the factory as 1-2-3-4-5-6. For security purposes, you should immediately change it to your own unique code. You can reset your six-digit code at any time. When creating a new code, avoid using personal data such as birth dates, street numbers or phone numbers to keep your valuables as secure as possible. Choose a six-digit code that only you know and can easily remember.



Always have the safe door open and locking bolts extended whenever changing your code.


1. Press * six times
2. Enter your existing six-digit code once
3. Enter your NEW six-digit code twice
4. Enter your NEW code one more time to unlock the safe
5. Test your code multiple times before closing your safe door (**to help prevent an unintentional lockout do not test the code with the safe door closed**)



If a mistake is made, wait 30 seconds and then repeat steps 1-4.

Using Your Sentinella™ Override Key

1. Remove the battery from the lock
2. Using a screwdriver, remove the outer two screws at the bottom of the keypad (**store the screws in a convenient location to avoid losing them**)
3. Remove the front of the keypad from the safe door
4. Insert key into override slot with **key notch facing up**
5. Turn key counterclockwise to unlock
6. Turn safe handle clockwise to unlock and open safe door
7. Turn key clockwise, remove key, and reinstall front of keypad using screws removed earlier
8. Insert battery panel back into keypad and close safe (safe will lock as normal)




SecuRam™ Electronic Lock

Installing the Battery

We highly recommend using a Duracell® or Energizer® alkaline battery with a “Use Date” of at least 4 years in the future.

1. Unlock and pull your nightstand safe door open.
2. To remove the keypad, push straight up from the bottom of the keypad until it releases.
3. Carefully pull the keypad away from the nightstand safe to prevent damage to the wiring harness.
4. With the battery cavity accessible, install a new 9-volt battery into the terminals and tuck the battery and wiring harness back into the battery cavity.
5. Slide the keypad back down onto the shoulder screws. Be careful not to pinch the wiring harness on the screws.
6. With the door open, test the operation of the lock several times before closing and locking the nightstand.

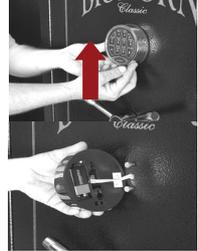

Operating Your Electronic Lock

1. To unlock the nightstand safe, enter the existing six-digit code. Each key press is confirmed with an audio and visual (LED flash) signal.
2. The lock will indicate a valid code entry with a double signal. Within 4 seconds, turn hand wheel clockwise to retract the lock tang.
3. To lock the nightstand safe, turn the handle counter-clockwise until it stops to allow the lock tang to extend. Always test to see if the lock has re-engaged by turning the handle clockwise.

Wrong Try Penalty

Every invalid code entry is indicated by a triple signal. Entering 4 consecutive invalid codes result in a 5-minute delay period. The LED will flash at 5-second intervals. At the end of the delay period 2 or more incorrect codes will restart an additional 5-minute delay period.



Removing the battery during the delay period will extend the delay period.

Additional Electronic Lock Information



LOW BATTERY IS THE MOST COMMON CAUSE OF ELECTRONIC LOCK ISSUES.

Repeated beeping during opening or any other unfamiliar occurrences indicates that the battery is low and needs to be replaced immediately.

Changing Your Code (Securam™ Locks)

All Securam™ lock codes are set at the factory as 1-2-3-4-5-6. For security purposes, you should immediately change it to your own unique code.

You can reset your six-digit code at any time. When creating a new code, avoid using personal data such as birth dates, street numbers or phone numbers to keep your valuables as secure as possible. Choose a six-digit code that only you know and can easily remember.



Always have the nightstand's safe door (if equipped) open and locking bolts extended whenever changing your code.

1. Press "0" six times.
2. Enter your existing six-digit code once.
3. Enter your NEW six-digit code twice.
4. Enter the NEW code once more to unlock the lock.
5. Test the lock several times with your new combination before closing and locking the safe.



If a mistake is made, wait 30 seconds and then repeat steps 1-4.

Lost Codes and Keys for Locks

Most safes with electronic locks (and/or key locks) have their override code on file at Rhino Metals. The override codes are tracked by model and serial number. If you have lost your code, a \$25.00 research fee will be assessed for restoring the code to you. If you have lost your keys, a \$50.00 fee will be assessed for each set of duplicated keys requested. Please allow up to 6 weeks to receive the keys. Both requests require completing and providing proper documentation of safe ownership. **We cannot guarantee that Rhino Metals can recover a code/combination nor are we responsible for keeping the information. Please keep your code/combination in a secure place outside your safe.**



IMPORTANT FOR ELECTRONIC LOCKS


- ◆ DO NOT CLOSE THE SAFE DOOR IF THE CODE/COMBINATION DOES NOT WORK. Refer to the Troubleshooting Guide or call Rhino Metals Tech Support for further assistance. Do not wait until your safe is locked out.
- ◆ Store your safe's model, serial number, owner's manual, keys, and combination in a secure location outside your safe.
- ◆ When a code is changed, always check to make sure the previous code will no longer open the lock.
- ◆ Replace the battery annually to ensure reliable access into your safe.
- ◆ Always center the handle or hand wheel with the safe door to ensure that there is no pressure on the lock as it could cause a lockout.

REMOVING SHIPPING FEET (IF EQUIPPED)



It is recommended to use a minimum of 2 people for assistance during this process.

1. For safety purposes, place two rectangular blocks (one on the left and another on the right) underneath the nightstand. These blocks should be long enough to span from the front to the back of the nightstand.
2. Open nightstand door and remove four black anchor hole plugs located on nightstand interior floor (see Picture 1)*.
3. Using a 19mm socket wrench, remove bolts from anchor holes by turning bolts counter-clockwise. Replace black caps on all exposed holes. Close and lock nightstand door before proceeding to next step.
4. From the top right side of the nightstand, push up slightly towards the opposite side of the nightstand. Carefully pull shipping foot and rectangular block away from underneath the tipped up side of the nightstand (see Picture 2).
5. Once shipping foot and block have been removed from one side of the nightstand, carefully lower the nightstand to the floor (see Picture 3)
6. Repeat steps 4-5 for removal of other shipping foot.



Picture 1




Picture 2
Carefully pull shipping foot
and block from underneath
the safe.



Picture 3
Carefully lower
the safe to floor.

*For nightstand models with a carpeted floor bottom without visible anchor holes, before step 2, pull carpet tab up and raise scored bottom floor up (floor may fold) to reveal anchor holes.

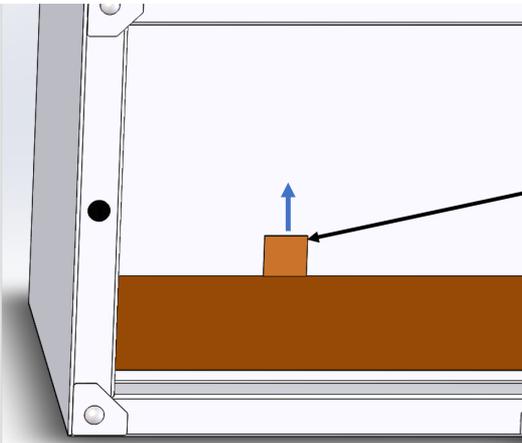

Pull carpet tab up
to reveal anchor
holes (move
carpeted
sheetrock to back
of nightstand)
Note: bottom is
scored to allow
for folding and
easy removal

ANCHORING YOUR NIGHTSTAND



SECURITY PRECAUTION

- ◆ Just like full sized safes, nightstand safes should be bolted to the floor for the best security



SAFETY PRECAUTIONS

- ◆ Do not attempt to move the nightstand with the nightstand's safe door open or unlocked.
- ◆ Your nightstand can be very heavy. Always use extreme caution when moving your nightstand to prevent damage to flooring, doorways and walls.
- ◆ Practice using personal protective equipment whenever operating power tools to prevent dust and debris entering your eyes, nose or mouth.
- ◆ Failure to follow this precaution can result in serious injury or death.

Your nightstand is predrilled from the factory for anchoring with 2 or 4 holes through the floor of your nightstand. Your nightstand may be anchored directly to the floor.

Anchor bolts and washers are not included with your nightstand. You will need to purchase anchor bolts suited for your floor type. We recommend using a minimum of 3" long wedge anchor bolts for concrete floors that are 3/8" in diameter. For wood floors, we suggest a minimum of 2 1/2" long lag bolts that are at least 3/8" in diameter. Always research your floor type to make sure standard anchor bolts or lag bolts are adequate. You will also need to purchase 3/8" flat washers.

Please contact a local contractor for the appropriate drilling method and tools needed to securely and safely anchor your nightstand to your floor type.

1. With the nightstand's safe door closed, place the nightstand in the exact location desired.
2. Open the nightstand safe door and remove the black caps in the nightstand floor to reveal the anchor holes.**
3. Mark the center of the locations of the holes.
4. Close and lock the nightstand safe door. Move the nightstand far enough to have space to drill the anchor holes. Be sure to follow your local contractor's instructions for drilling the anchor holes in your floor type.
5. Reposition the nightstand over the anchor holes.
6. Open the nightstand safe door and install the anchor bolts. Be sure to follow the bolt manufacturer's installation instructions.
7. Replace the black caps in the nightstand floor.

**Please see instructions on page 16 if anchor holes are not readily visible on the nightstand floor.

CARE AND MAINTENANCE

Cleaning Nightstand Body

Use a clean and soft cloth (such as a microfiber cleaning cloth) that is slightly damp with water to clean the exterior of the nightstand.

Cleaning Nightstand Locks and Handles

Locks and handles are coated to protect from rust or tarnish. Do not use any kind of metal polish or harsh cleaning products. Simply wipe off with a soft, damp cloth. Minor scratches may be touched up with a paint touch up kit available from Rhino Metals.

Electronic Lock Maintenance

While electronic locks do not need annual maintenance, changing out the battery once a year is highly recommended to ensure reliable access into the nightstand safe. We recommend using a 9-volt Duracell® or Energizer® alkaline battery with a "Use Date" at least 4 years in the future.

Heat Expandable Fire Seal

Seal does not require any maintenance, nor should it be removed.

Internal Locking Mechanism

The internal locking mechanism requires no maintenance. Opening the door panel of the nightstand by anyone other than a certified lock technician may void the warranty.

Lubricating the Locking Bolts

To keep the locking bolt action smooth and relieve any stresses from the mechanism, add a small amount of lubricant to the locking bolts once a year. With the door open and the handle rotated counter-clockwise to extend the locking bolts, wipe a very small amount of lubricating grease onto the moving locking bolts around the door. We recommend using Super Lube™ or a multi-purpose silicone grease with Teflon®.

TROUBLESHOOTING

Common Issues	Possible Solutions
Electronic lock is not working properly	Replace the battery with a new Duracell® or Energizer® 9-volt alkaline battery with a “Use Date” at least 4 years in the future.
	Any pressure on the side of the lock tang may prevent the lock from operating properly. If you are attempting to <u>unlock the nightstand</u> , rotate the handle counter-clockwise and keep a slight pressure on the handle while you enter your code. Once you hear a beep, wait for 2 seconds, and then rotate hand wheel clockwise to open. If you are attempting to <u>lock the nightstand</u> , turn the handle counter-clockwise until it stops, then press and hold the handle counter-clockwise for 7 seconds before checking if it is locked.
	Make sure the wiring harness is properly and tightly connected to the keypad with no pinched wires or bent connectors.
	If periodically flashing and beeping, you may be in a delay period. Do not attempt to enter any code for a period of 5 minutes. Changing or removing the battery on the keypad while in a delay period will extend the delay period. After waiting the duration of the delay period and the keypad stops flashing and beeping, you may then enter the combination.
Lost code or keys	See LOST CODES AND KEYS instructions on page 15. Rhino Metals, Inc. can not give codes/combinations over the phone as there is no method to verify ownership of the nightstand.
Nightstand safe door is loose	Nightstand safe door can be adjusted by the door adjustment tabs located inside the nightstand safe - see DOOR ADJUSTMENT TABS instructions on page 11.
Nightstand safe door is dragging	Make sure the nightstand safe is on level ground. If not, use shims to level the nightstand safe.
Rust or corrosion on contents	Place a battery-powered dehumidifier or silica gel pack inside the nightstand.

WARRANTY CLAIMS AND REPAIRS

Please carefully read the Limited Warranty on page 21. It details the length of coverages and limitations for services and repairs. All warranty services must be pre-authorized by Rhino Metals and require completing and providing proper documentation of ownership of the nightstand. If you have any warranty questions, contact your dealer or Rhino Metals Tech Support. It is the sole responsibility of the nightstand owner for payment on any services or repairs done without pre-authorization from Rhino Metals.

INSURANCE COVERAGE

We highly recommend that you purchase an additional insurance coverage to the total value of the contents of your nightstand. The Limited Warranty does not insure any of the contents inside your nightstand. Most homeowner insurers require purchasing endorsements or riders for valuables exceeding the standard coverage policy for personal items. Be sure to check with your residential insurance provider for more details.

EXTENDED LOCK WARRANTY (SOLD SEPARATELY)



Warranty must be purchased within 30 days of safe purchase to become valid.

Rhino Metals offers to the original purchaser an Extended Lock Warranty, covering defects in workmanship and material on either electric or manual locks. Locks and electronic keypads carry a one-year warranty for labor and parts. The Warranty does not cover forgotten or lost combinations, keys, dead or weak batteries, or improper opening procedures. This Warranty applies only to safes located in the United States, purchased at an authorized Rhino Metals safe dealer, and that have been used solely in residential applications.

Extended Lock Warranty coverage is offered from original date purchased, either 2 years at \$29.99 or 4 years at \$59.99. In order to receive warranty support under this Warranty, Purchaser must provide Rhino Metals, Inc. with (1) proof of purchase, (2) Serial Number on safe, and (3) payment. For payment, we accept Visa, Discover, Mastercard, Amex and money orders. Money orders can be made payable to: Rhino Metals, Inc.

Rhino Metals, Inc. will make the decision to repair the safe and/or lock in-home, at the factory, or replace the safe and/or lock altogether. If possible, the safe and/or lock will be repaired locally. If the safe and/or lock is to be repaired at the factory or replaced, Rhino Metals, Inc. will, at its expense, have the safe opened, if required, and will pay for the freight back to the factory. Purchaser must package the safe and make the safe available for a curbside pickup at their expense. The Warranty does not cover any costs for removal or installation of the safe or its contents. Personal property in the safe is not covered by the Warranty.

The obligation of Rhino Metals, Inc. under this Warranty is contingent upon proper use, installation, and maintenance of the safe and lock. This Warranty shall not apply to safes, locks or safe parts which have been neglected, misused, or exposed to extreme or unusual environments. Any modifying or tampering with the safe or lock which alters or affects the safe or lock's use or operation voids this Warranty.

Without limit, this Warranty specifically excludes any liability for defects or damage caused or increased by the use of unauthorized parts. Upon purchase, the Purchaser must promptly notify Rhino Metals, Inc. of any defects. The Purchaser's remedies are solely limited to replacing parts or repair and are at the discretion of Rhino Metals, Inc.. This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

This Warranty is given in place of all other warranties and assurances, whether expressed or implied, including but not limited to matters of merchantability, quality, or fitness for purpose. Rhino Metals, Inc. accepts no liability under any circumstances whatsoever, for any incidental or consequential damage or loss suffered by anyone as a result of using or being unable to use the safe or lock.

To purchase the Extended Lock Warranty, go to www.rhinosafe.com (or complete and return the purchase form located on page 21) within 30 days to Rhino Metals, Inc.

LIMITED WARRANTY

Rhino Metals, Inc. (the “Company”) warrants to the original consumer (the “Purchaser”) that the product will be free from defects in workmanship and materials for a period of one (1) year from the date of purchase. These warranties are not assignable or transferable to any other person.

1. The Company is not responsible for lost or forgotten codes/combinations or keys.
2. Any damage to the product as a result of destruction, misuse, tampering, abuse, neglect, accident, improper installation, modification, unauthorized service or violation of the instructions furnished by the company will void this warranty.
3. The sole responsibility of the Company shall be limited to the repair or replacement (in its sole discretion) of any component of the product which fails to conform to this warranty at no cost to the purchaser for a period of one (1) year from the date of original purchase.
4. Contact the company directly to obtain service under this warranty. A Return Authorization Number must first be obtained prior to returning defective products to the company.
5. Products shipped without prior Return Authorization and Return Authorization Number may not be accepted. The company will not be responsible for their disposition and/or cost of return to the owner.
6. The company will not assume any responsibility for any loss or damage incurred in shipping. All returned products should include a copy of the original invoice in order that this warranty may be honored.
7. This warranty is not an insurance policy. The company is not responsible for damage or theft of the purchaser’s product or its contents.
8. Any implied warranties which the purchaser may have are limited to the duration of the warranties described above. There are no further warranties which extend or apply beyond the face hereof, and the company expressly disclaims and excludes any and all warranties of merchantability or fitness for a particular purpose. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.
9. Repair or replacement shall be the sole remedy for the purchaser under this warranty. The company shall not be liable for any direct, indirect, incidental or consequential damages, losses or expense arising from the use or misuse of the product. Some states do not allow the exclusion or limitation of incidental or consequential damages so the limitation may not apply to you.
10. This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.

This Warranty is given in place of all other warranties and assurances, whether expressed or implied, including but not limited to matters of merchantability, quality, or fitness for purpose. Rhino Metals accepts no liability under any circumstances whatsoever, for any incidental or consequential damage or loss suffered by anyone as a result of using or being unable to use the product.

This Limited Warranty is only applicable to all nightstand (LNS or BNS) models produced by Rhino Metals.



EXTENDED LOCK WARRANTY PURCHASE FORM

To purchase the Extended Lock Warranty, visit www.rhinosafe.com or cut this purchase form along dotted line, complete and return by mail, along with a copy of the original purchase receipt, to:

Orders Department
Rhino Metals, Inc.
607 Garber Street
Caldwell, Idaho 83605

Model Number	Serial Number

Name _____

Address _____

City _____ Country _____

State/Prov _____ Zip/Postal _____

Phone _____

Email _____

Date of Purchase _____ Check box if you prefer not to receive our newsletter.

Type of Lock: SecuRam™ Electronic Lock Sentinella Electronic Lock

Please choose one option: 2 years—\$29.99 4 years—\$59.99

Card Information: VISA Mastercard Discover AMEX

Cardholder Name: _____

Card Number: _____

Exp. Date: _____ 3-digit Security Code: _____

Signature: _____



RHINO METALS™

**THANK YOU FOR YOUR LOYALTY
AND CONTINUED SUPPORT AS WE STRIVE
TO PROTECT AND SECURE AMERICA.**

VISIT OUR YOUTUBE PAGE AT: RHINO METALS - TO WATCH OUR STORY



A FIGHTER PILOT'S JOURNEY TO BUILDING THE BEST SAFES IN THE WORLD



★ ★ ★ PROTECTING & SECURING AMERICA ★ ★ ★

VETERAN OWNED AND OPERATED SINCE 1995

 @rhinometals

 Rhino Metals, Inc.

 Rhino Metals

MANUFACTURED BY RHINO METALS, INC. | WWW.RHINOSAFE.COM | (208) 454-5545